

>> Type of use (\*)



Light industry    Heavy industry    Structural works    Maintenance    Public works

>> Technical features


- ✓ Anodized aluminium bar anchor.
- ✓ Installation on door or window frame.
- ✓ Adjustable from: 60 to 125 cm.
- ✓ Length: 150 cm.
- ✓ Weight: 4.90 kg.
- ✓ **Packing:**  
- carton of 1 piece.



Learn more: [www.singer.fr](http://www.singer.fr)



Made under

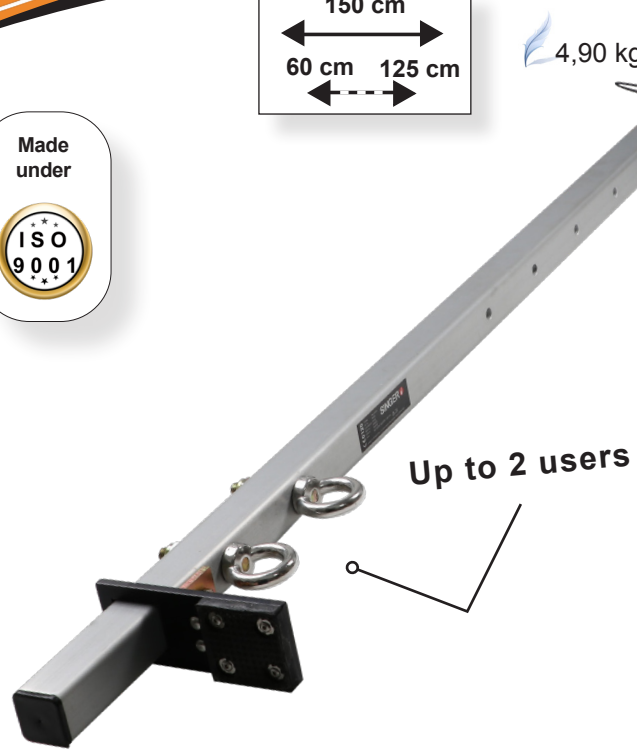

>> Advantages

- ✓ Does not require tools for setting up.
- ✓ **Up to 2 users.**
- ✓ Clever anchoring system and simple to assemble.
- ✓ Light weight, easy to carry.
- ✓ Supplied with its carrying bag.
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:

- **EN 795: 2012.** Personal protective equipment against falls from a height. Anchor devices.
- **CEN/TS 16415.** Technical specification. Recommendations for anchor devices for use by more than one person simultaneously.



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III.**

EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°2777**.  
The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**.  
Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**



(\*) Type of use is given as a guide only. It is to the end user to check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Issue LS\_2020.06.18. Copyright: Singer, Fodila.