




>> Type of use (*)

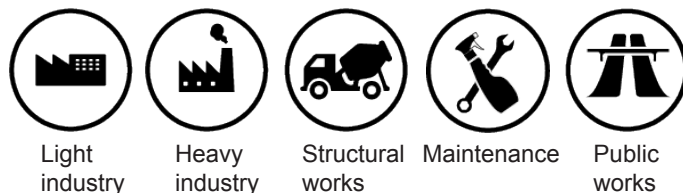

>> Technical features


- ✓ Safety hook.
- ✓ Class A & T.
- ✓ Aluminium.
- ✓ Self opening and locking type, double action.
- ✓ Opening **60 mm**.
- ✓ Minimum Breaking Strength: **22 kN**
- ✓ Weight: **480 g**.
- ✓ Packing:
 - carton of 25 pieces.
 - bundle of 1 piece.



Learn more: www.singer.fr

>> Advantages

- ✓ Very light weight.
- ✓ All the connectors pass the salt spray test for 72 hours against 50 hours as required by the European standards. Thus we maintain a higher benchmark against corrosion.
- ✓ The outer and especially interior edges of the connectors are perfectly smooth.
- ✓ We control and produce in a single factory the creation and fabrication of the products: weaving coated thread into straps, stamping metal pieces and chemical treating, harness assembly, individual control and real-time testing thanks to the different laboratory devices and tools etc
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:
EN 362: 2004. Personal protective equipment against falls from a height. Connectors.



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE).
Category III.

EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°2777**.

The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**

