




1.60 kg

10.00 m Ø 12 mm

>> Type of use (*)

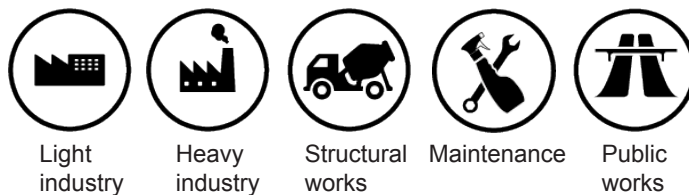

>> Technical features

- ✓ Aluminium mobile fall arrester on rope.
- ✓ Double action closing.
- ✓ Includes a triple action aluminium captive connector OVALUX, connected by a micro-cable.
- ✓ Fall arrest device: braided polyester rope.
- ✓ Diameter: **12 mm**.
- ✓ Length **10 meters**.
- ✓ Weight: **1.60 kg**.
- ✓ **Packing:** - carton of 10 pieces.
- under individual polybag.



Learn more: www.singer.fr



>> Advantages

- ✓ Includes a triple action aluminium captive connector OVALUX, connected by a micro-cable.
- ✓ Fluid on ascent and descent, with no action required from the user.
- ✓ Includes an energy absorber protected by a 30 cm sheath.
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:
EN 353-2: 2002. Personal protective equipment against falls from a height.
Guide type fall arresters on a flexible anchorage line.



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III**.
EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body n°2777.
The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body n°0598.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**

