




3.00 kg

20.00 m Ø 12 mm

>> Type of use (\*)

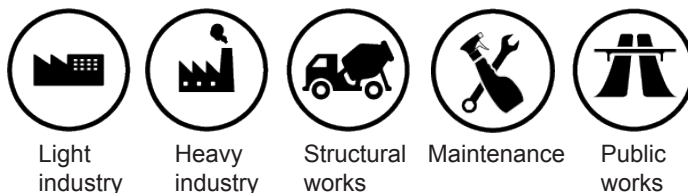

>> Technical features

- ✓ Aluminium mobile fall arrester on rope.
- ✓ Double action closing.
- ✓ Includes a triple action aluminium captive connector OVALUX, connected by a micro-cable.
- ✓ Fall arrest device: braided polyester rope.
- ✓ Diameter: **12 mm**.
- ✓ Length **20 meters**.
- ✓ Weight: **3.00 kg**.
- ✓ **Packing:** - carton of 10 pieces.  
- under individual polybag.



Learn more: [www.singer.fr](http://www.singer.fr)



>> Advantages

- ✓ Includes a triple action aluminium captive connector OVALUX, connected by a micro-cable.
- ✓ Fluid on ascent and descent, with no action required from the user.
- ✓ Includes an energy absorber protected by a 30 cm sheath.
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:  
**EN 353-2: 2002.** Personal protective equipment against falls from a height.  
Guide type fall arresters on a flexible anchorage line.

It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE).  
**Category III.**

EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°2777**.  
The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>



Your distributor **SINGER® SAFETY**

