




2.00 m Ø 14 mm



>> Type of use (*)

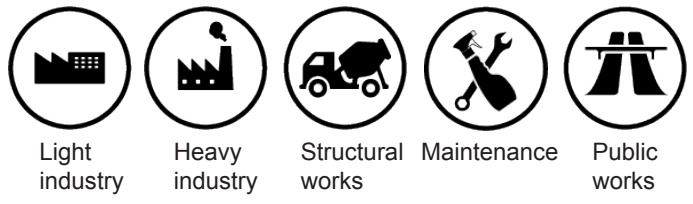

>> Technical features

- ✓ Work positioning lanyard.
- ✓ Made of 14 mm diameter polyamide 3 strand rope.
- ✓ Length: **2.00 m (with karabiner).**
1.80 m (without karabiner).
- ✓ Diameter: **14 mm.**
- ✓ Ring type adjuster of forged alloy steel. Easy to connect, steel karabiners at both ends.
- ✓ Packing:
 - carton of 10 pieces.
 - bundle of 1 piece.



Learn more: www.singer.fr

>> Advantages

- ✓ To guarantee the best quality, the production line of SINGER® Safety is fully integrated.
- ✓ We control and produce in a single factory of over 10,000 m² the creation and fabrication of the products:
 - weaving coated thread into straps,
 - Stamping metal pieces and chemical treating,
 - Harness assembly,
 - Individual control and real-time testing thanks to the different laboratory devices and tools, etc.



>> Conformity

This product has been tested according to the following European standard:
- **EN 358: 1999.** Personal protective equipment against falls from a height.
«Belts for work positioning and restraint and work positioning lanyards».



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III.**
EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°0277**.
The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**



(*) Type of use is given as a guide only. It is to the end user to check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Issue US_2019.12.30. Copyright: Singer, Fodlia.