




740 g

2.00 m Ø 12 mm



>> Type of use (*)

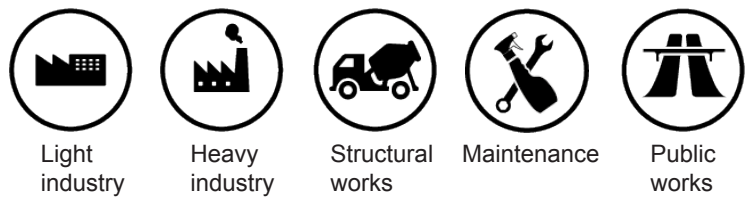

>> Technical features

- ✓ Work positioning lanyard.
- ✓ Braided polyester rope.
- ✓ Aluminium rope adjustment device, opening with two consecutive actions.
- ✓ Rope jamming system.
- ✓ Maximal length: **2.00 m**.
- ✓ Diameter: **12 mm**.
- ✓ Weight: **740 g**.
- ✓ Packing:
 - carton of 10 pieces.
 - bundle of 1 piece.



Learn more: www.singer.fr

>> Advantages

- ✓ Includes a triple action aluminium connector OVALUX.
- ✓ Includes a double action aluminium captive hook.
- ✓ Equipped with a 30 cm polyester rope protection.
- ✓ ISO 9001 certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:
 - **EN 358: 1999**. Personal protective equipment against falls from a height.
 «Belts for work positioning and restraint and work positioning lanyards».

It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III**.
 EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°0277**.
 The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**



(*) Type of use is given as a guide only. It is to the end user to check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Issue LS_2020.06.08. Copyright: Singer, Fodlia.